



INSTRUCTION MANUAL

SAFETY RELIEF VALVE

106 530 106 531 106 532

Manual : 574.114.112 - 1209

Date : 21/09/12 - Supersede : 20/03/06

Modif. : Update

TRANSLATION OF THE ORIGINAL MANUAL

IMPORTANT : *Before assembly and start-up, please read and clearly understand all the documents relating to this equipment (professional use only).*

THE PICTURES AND DRAWINGS ARE NON CONTRACTUAL. WE RESERVE THE RIGHT TO MAKE CHANGES WITHOUT PRIOR NOTICE.

KREMLIN - REXSON


150, avenue de Stalingrad

93 245 - STAINS CEDEX - France

☎ : 33 (0)1 49 40 25 25 Fax : 33 (0)1 48 26 07 16

www.kremlin-rexson.com

PART NUMBER OF THE BODY : 91838

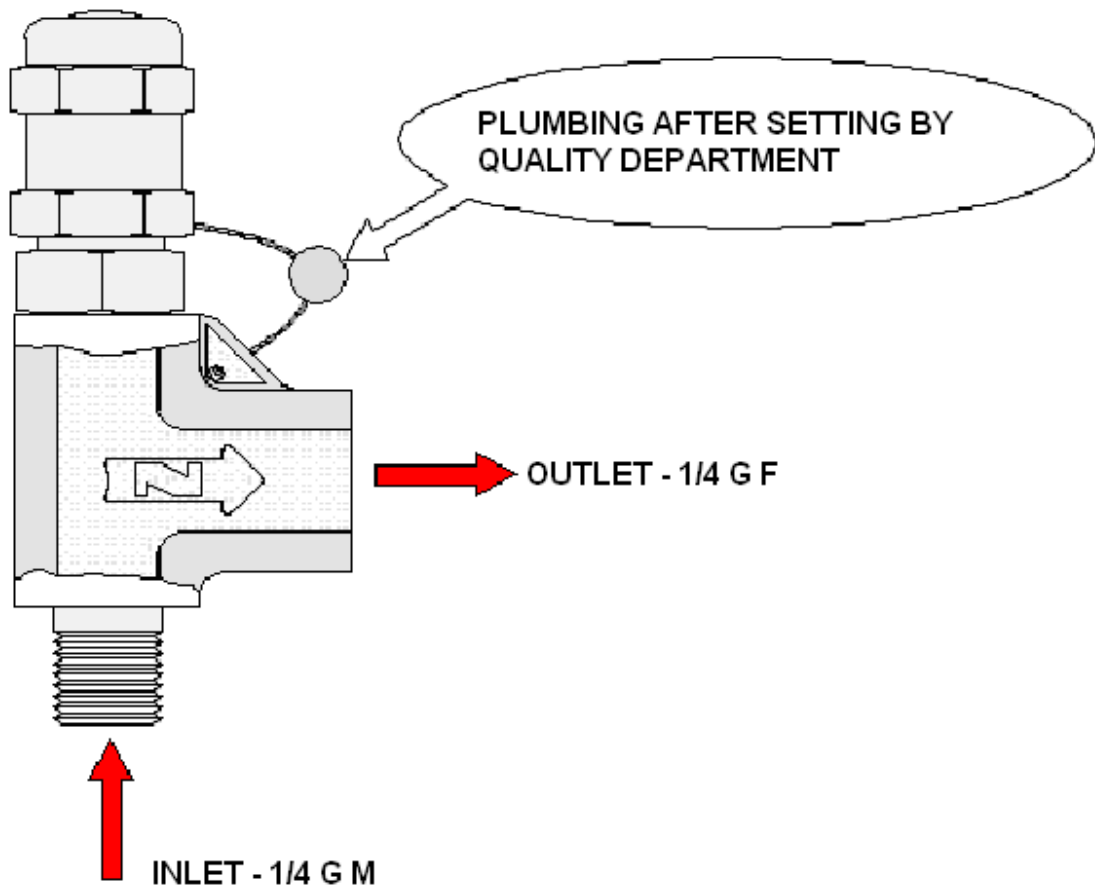

SPRING PART NUMBER FOR SAFETY RELIEF VALVE
DEPENDING UPON PRESSURE SETTING RANGE

From 344 to 413 bar / from 4989 to 5990 psi : # 91835 GREEN SPRING



From 100 to 155 bar / from 1450 to 2248 psi : # 91836 ORANGE SPRING



From 205 to 275 bar / from 2973 to 3988 psi : # 91837 WHITE SPRING



SETTED COMPLETE RELIEF VALVE between 344 and 413 bar / 4989 and 5990 psi # 106530



SETTED COMPLETE RELIEF VALVE between 100 and 155 bar / 1450 and 2248 psi # 106531



SETTED COMPLETE RELIEF VALVE between 205 and 275 bar / 2973 and 3988 psi # 106532

